




PTO DUST/ODOR CONTROLLER

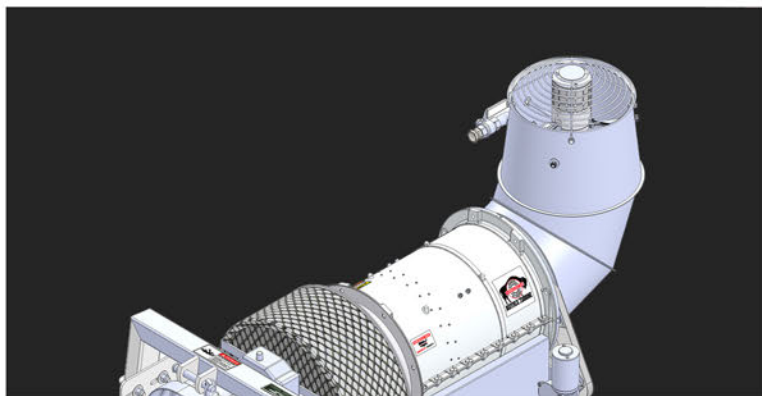

PTO DUST/ODOR CONTROLLER

- LIGHTWEIGHT
- REQUIRES ONLY STANDARD WATER PRESSURE
- NO EXTRA ENGINE TO SERVICE



BUFFALO TURBINE



TALK WITH OUR EXPERTS

8AM-4:30PM (Mon-Fri) EST

(716) 592-2700

BuffaloTurbine.com

PTO DUST/ODOR CONTROLLER

TOP BENEFITS

- Powerful and versatile
- Easy to operate and maintain
- Requires only standard water pressure
- 10 Year Manufacturer's Warranty

TOP FEATURES

- Standard garden hose hookup
- No extra engine to service
- Only 20hp required at the PTO
- Lightweight 282 lbs. including PTO shaft
- 360° nozzle control
- Minimal Maintenance

GENERAL INFO

- Gyrotory atomizing nozzle system
- Hose input: 3/4" utility / garden hose
- Min/Max water volume: 1/3 gallon - 20 gallons per minute at 120psi
- Min/Max water pressure: 40psi - 120psi
- Droplet size: 50 - 200 microns
- Throw distance (neutral wind conditions): Vertical-up to 50 ft / Horizontal-up to 125 ft
- One year Buffalo Turbine warranty

Applications

Demolition Sites • Landfills • Wood Recycling
Scrap Metal Recycling • Aggregate Processing
Waste Transfer

OPTIONS



Aerospace Polymer Nozzle



300 Gallon Tank

